

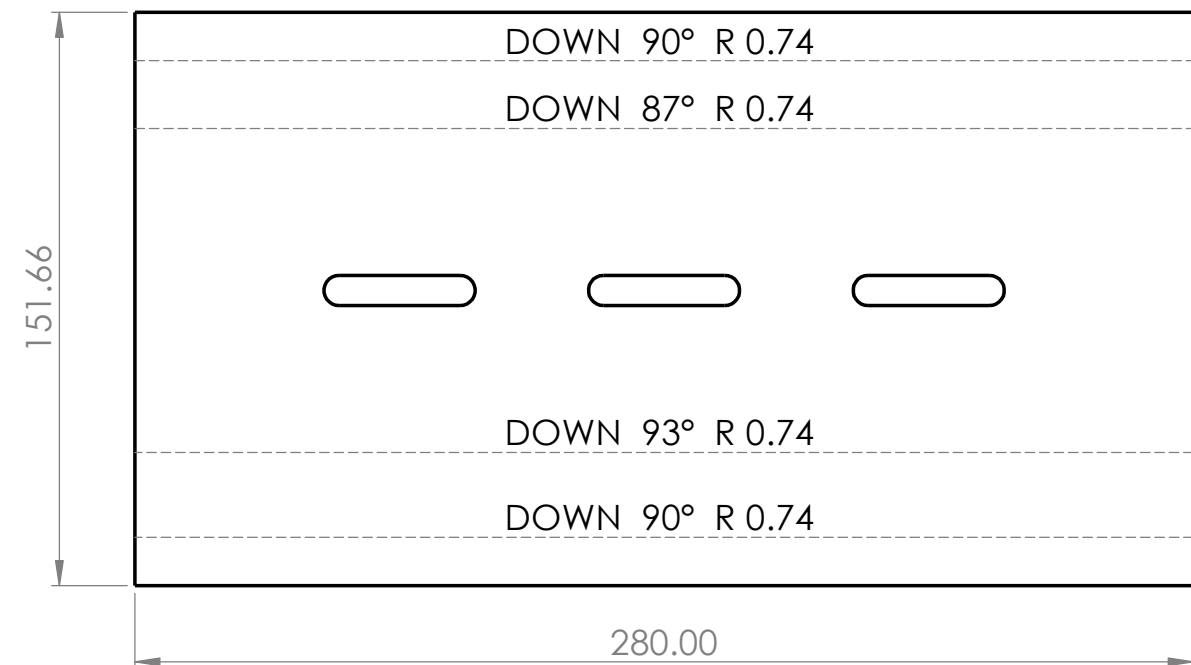
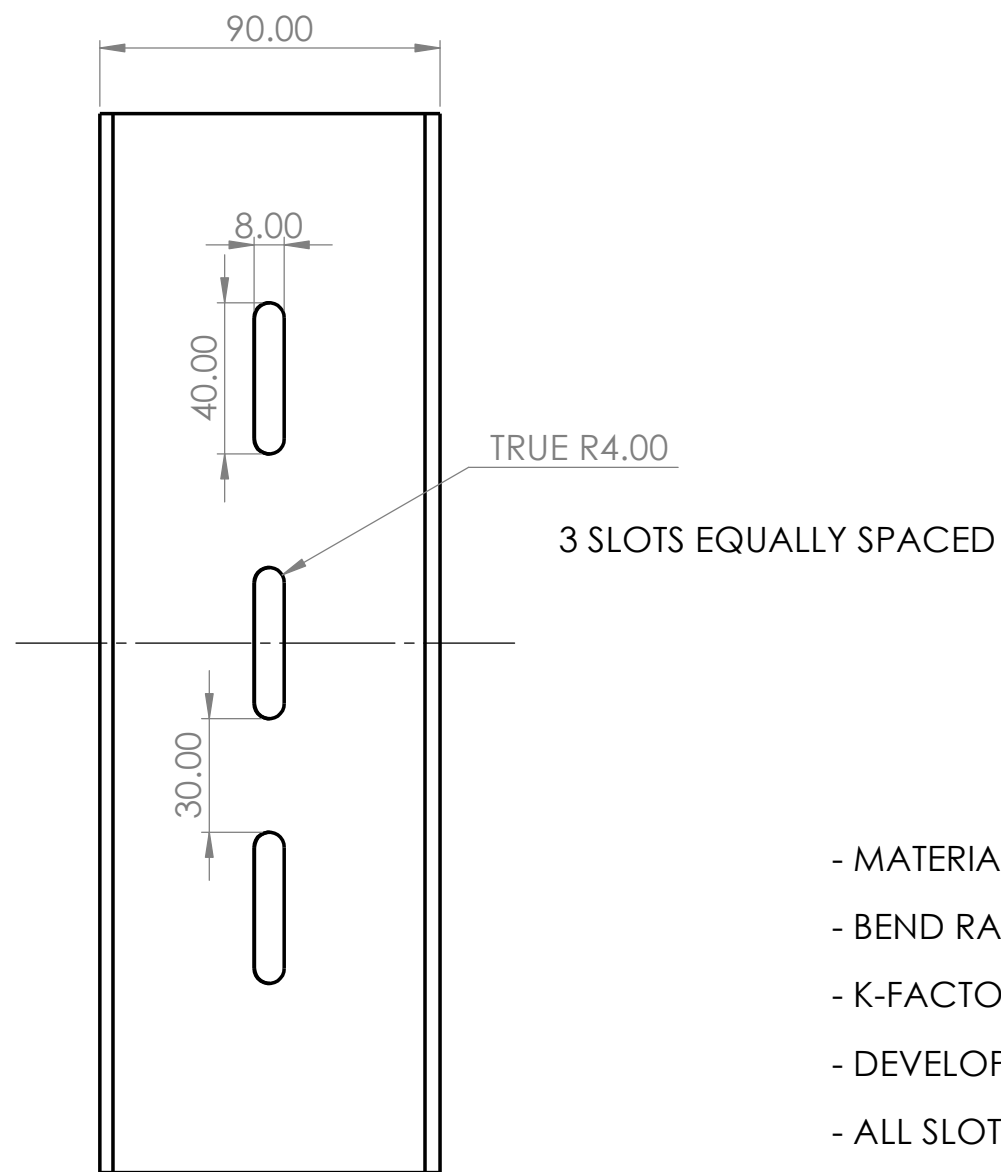


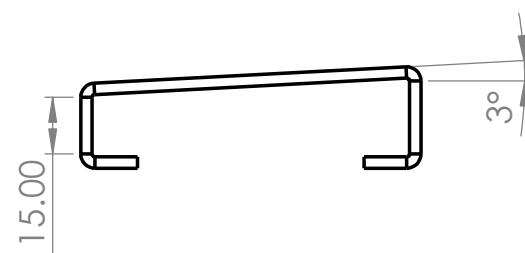

- MATERIAL THICKNESS: 3.0 mm.
- BEND RADIUS 0.74 INTERNAL UNLESS NOTED.
- K-FACTOR 0.44.
- DEVELOPED (FLAT) LENGTH 151.66 — REFERENCE ONLY.
- ALL SLOTS 40 X 8 OBOROUND, 3 EQUALLY SPACED AT 30mm PITCH.
- FORM PART SO STEP FACE FALLS 3° TOWARD FRONT (DRAIN) EDGE.
- GRIP/DRAIN SLOTS TO BE DEBURRED BOTH SIDES.

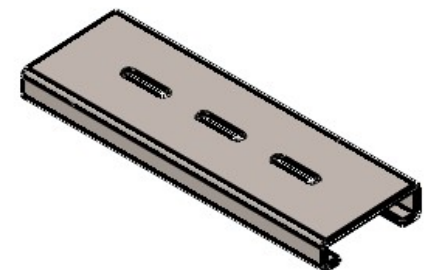

REVISION	DESCRIPTION:	DATE:	INITIALS:	TOLERANCES: LINEAR: ± 0.5 ANGULAR: $\pm 0.5^\circ$	DRAWN: KYE JACKSON 10/08/26	
		DD/MM/YY		SURFACE FINISH: 316 STAINLESS, 3 mm	CHECKED: DD/MM/YY	
				MATERIAL: MIRROR POLISH RA 0.8 (EXPOSED)	APPROVED: DD/MM/YY	
				 DRAFTING STANDARD AS 1100	P16082602 SHEET METAL STEPS KYE JACKSON DESIGN	
ALL DIMENSIONS IN mm					SCALE: 1:2	SHEET 1 OF 1
					LOGO	SIZE A3